THE PINE MOUNTAIN (LOFT SERIES)



THE PINE MOUNTAIN LOG HOME PACKAGE INCLUDES:

FORK

• LOG WALL SYSTEM

- Pre-cut wall logs
- 12" lags and saturated foam gasket
- 1/2" log wall rods with springs
- Assembly prints
- Base board trim and log siding for subfloor band boards

• WINDOW & DOOR FRAMING SYSTEM

NOI

- Pre-cut, window and door jambs
- Interior and exterior 1" trim lumber

• LOFT FRAMING SYSTEM

- Pre-cut loft joists
- Pre-cut girder beams
- 6" x 6" support posts with adjusters
- Installation hardware

• ROOF FRAMING SYSTEM

- Pre-cut rafters and ridge beams
- Support posts and rafter collar ties
- Pre-cut dormer headers, sills, and support posts
- Log siding for gable ends and dormers


PORCH FRAMING SYSTEM

- Pre-cut plates and rafters
- 6" x 6" pressure treated foundation, support posts and sills
- Pre-cut pressure treated 2" x 8" joists and 5/4" decking

• TRIM LUMBER

TCH CABIN FEVER

- Surfaced trim lumber for gable ends, dormers, facia, and porch eaves
- **OPTIONS:** 2" x 6" or 2" x 8" T & G flooring and sheeting, and rigid insulation

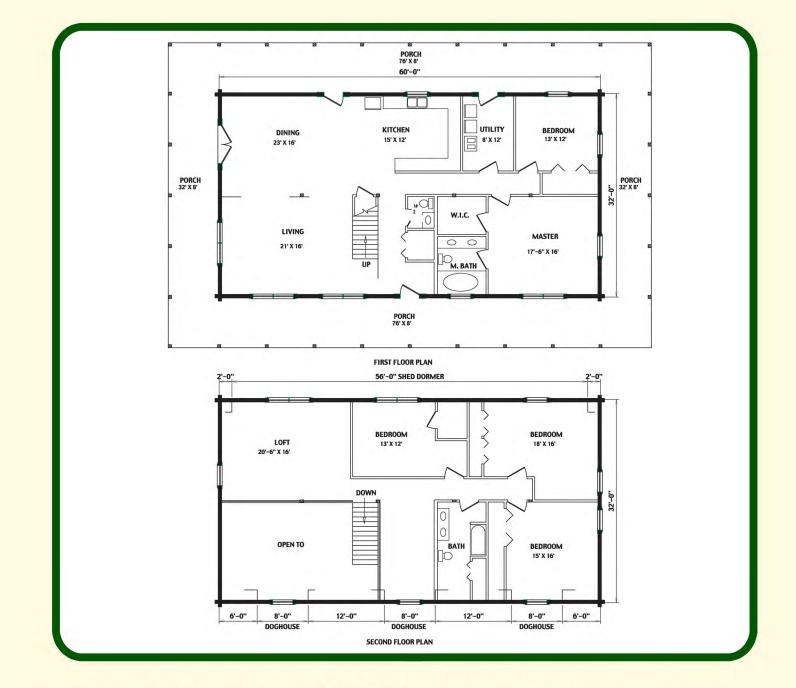

THE PINE MOUNTAIN

- 32' x 60'
- 3456 Square Feet Living Area
- 1920 Sq. Ft. First Floor, 1536 Sq. Ft. Second Floor
- 12' x 216' Wrap Around Porch



North Fork Lumber & Log Homes • P.O. Box 146 • 250 North Fork Lane • Goshen, VA 24439 (800) 272-2365 • (540) 997-5602 • www.northforklumber.com